

GENERAL

Brand Cimbria

Model Unitest - Software standard

The Unitest system can be used in all types of grain storage facilities and can be installed in both new and existing installations. The temperature is constantly monitored by means of a number of sensors which are fitted in carrying cables specially designed for installation in harsh environments.

Software Facilities


The new generation of Unitest 5G provides operators with many new and improved facilities in order to optimize the drying process, the fumigation and aeration costs, so loss of dry-matter, weight and unnecessary handling can be avoided. The software's unique facilities combined with the markets most reliable hardware are our customers' best insurance for safe storage.

Standard Key facilities in Unitest 5G software

- Storage plant view
 Indicates storage situation in each bin or warehouse
- Actual temperature
 Display of present readings from all sensors
- Delta temperature
 The temperature changes in all sensors within the last 24 hours
- Alarms
 According to actual- and delta temperatures and grain level
- Alarm set points
 On each individual cable based on actual and delta temperatures
- Language
 Available in many language
- Level Control (manual)
 Selective display of grain level for each bin
- SQL Data base
 Saves information for up to 1 year



Storage plant view

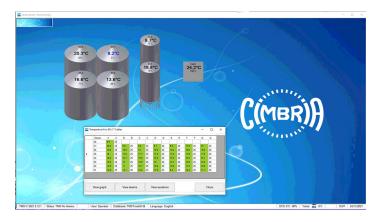

Display of actual temperature

